



**Esecuzione speciale
con raddrizzatore di flusso**

*Special execution
flow straightener*

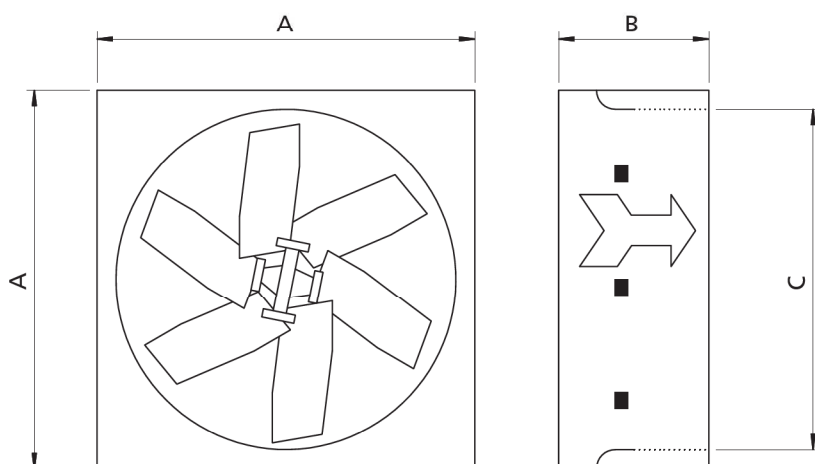

M _B Type	D _{fl} Dimensions			
	A	B	C	g
ES 80 R/R	800	330	660	28
ES 80 R/S	800	405	660	32
ES 100 R/R	960	330	785	30
ES 100 R/S	960	405	785	44
ES 120 R/R	1150	330	990	40
ES 120 R/S	1150	405	990	50
ES 140 R/R	1380	330	1270	50
ES 140 R/S	1380	405	1270	70
ES 200 R/R	1930	450	1750	75
ES 200 R/S	1930	450	1750	100

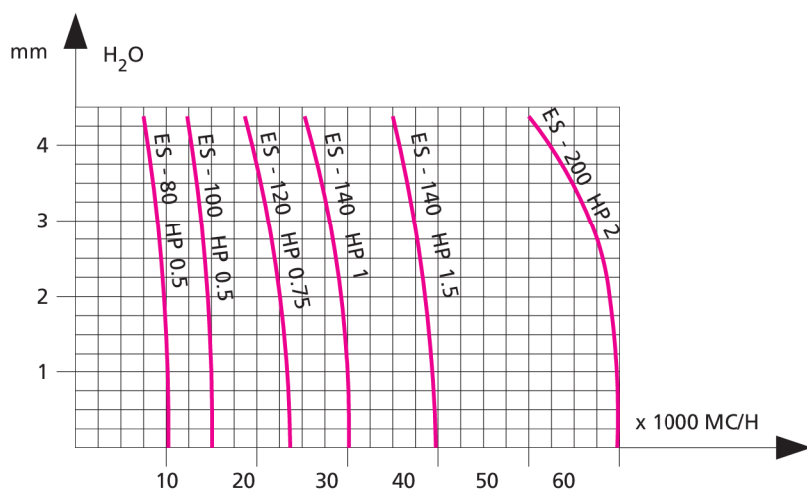

M _B Type	M _B Motor HP	P _B Power W	g
ES 80	0,5	0,37	220/380
ES 100	0,5	0,37	220/380
ES 120	0,75	0,55	220/380
ES 140	1	0,75	220/380
ES 200	2	1,5	220/380